

# Christmas Stocking Pattern



Custom Quilted Crafts



# Mario Stocking Directions




## Step 1: Piecing the Mario Design:

For the Mario design, the measurements and examples for cutting the pieces are in a chart below. Pieces that are not on this chart will be labeled on the diagram that shows the seams and order.

### How to Piece it:

The next page will show the order of piecing. It is based on 2"x2" blocks that can be pieced together in any order. However the order for how to piece each block is shown with color-coded lines. Blue lines are sewn first, pink lines are sewn second and purple lines are sewn last. The dark blue lines show the seams between blocks. Blocks that only contain four 1"x1" squares are not color coded because the order you piece the block doesn't matter

.

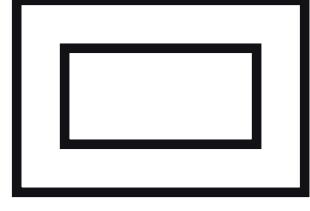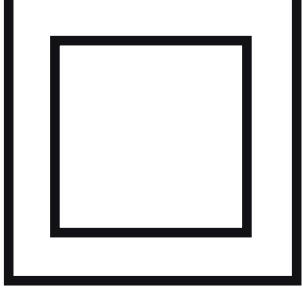Description	Size to Cut	Size after you sew it	Example at actual size
One Pixel	1"x1"	1/2"x1/2"	
Two Pixels	1x1.5"	1/2"x1"	
Three Pixels	2"x1"	1.5"x 1/2"	
2x2 Pixels	1.5"x1.5"	1"x1"	



# Step 2:

2A-After assembling the Mario design, cut the boot shape out with three separate pieces of fabric. two for the lining of the boot and one for the back of the boot.

The lining can be done on its own or you can put batting inbetween the lining and the back and front and quilt them.

2B-Place the Mario piece with the right side facing the right side of the backing fabric. Place the lining pieces on the outside of those pieces with the right side facing out.

2C-Sew together these all those pieces with a 1/4" seam allowance, leaving the top open.

2D-Trim the fabric on the corners to 1/8" from the seam and turn the stocking right side out.

2E-Cut the cuff piece on a fold.

2F-With right side of the fabric facing in, sew along the first seam so that it creates a circle. Turn the fabric right side out and fold the circle in half so that the edges of the fabric are lined up.

2G-Place the cuff inside the stocking and line the raw edges up with the raw edges of the stocking. Sew all layers together with a 1/4" seam allowance.

2H-The raw edge will seem like it is on the wrong side, but once you have attached the cuff you will fold it over to cover the seam and sew the cuff as low as you would like it.

The following pages will have the pattern pieces,

If you have any trouble with this pattern please email [cole@colesquilts.com](mailto:cole@colesquilts.com) I will be more than happy to answer any questions or update the pattern as needed.

Please tag me if you post a stocking you made using this pattern Instagram @ColesQuilts.

Thank You

## Part 1

Key:

Blue is the line to cut


Pink is the 1/4 seam allowance

Black are the separations for printin. Match up the circles after printing all the pages and tape the papers together to create the pattern.


er  
the





Part2



Part 4

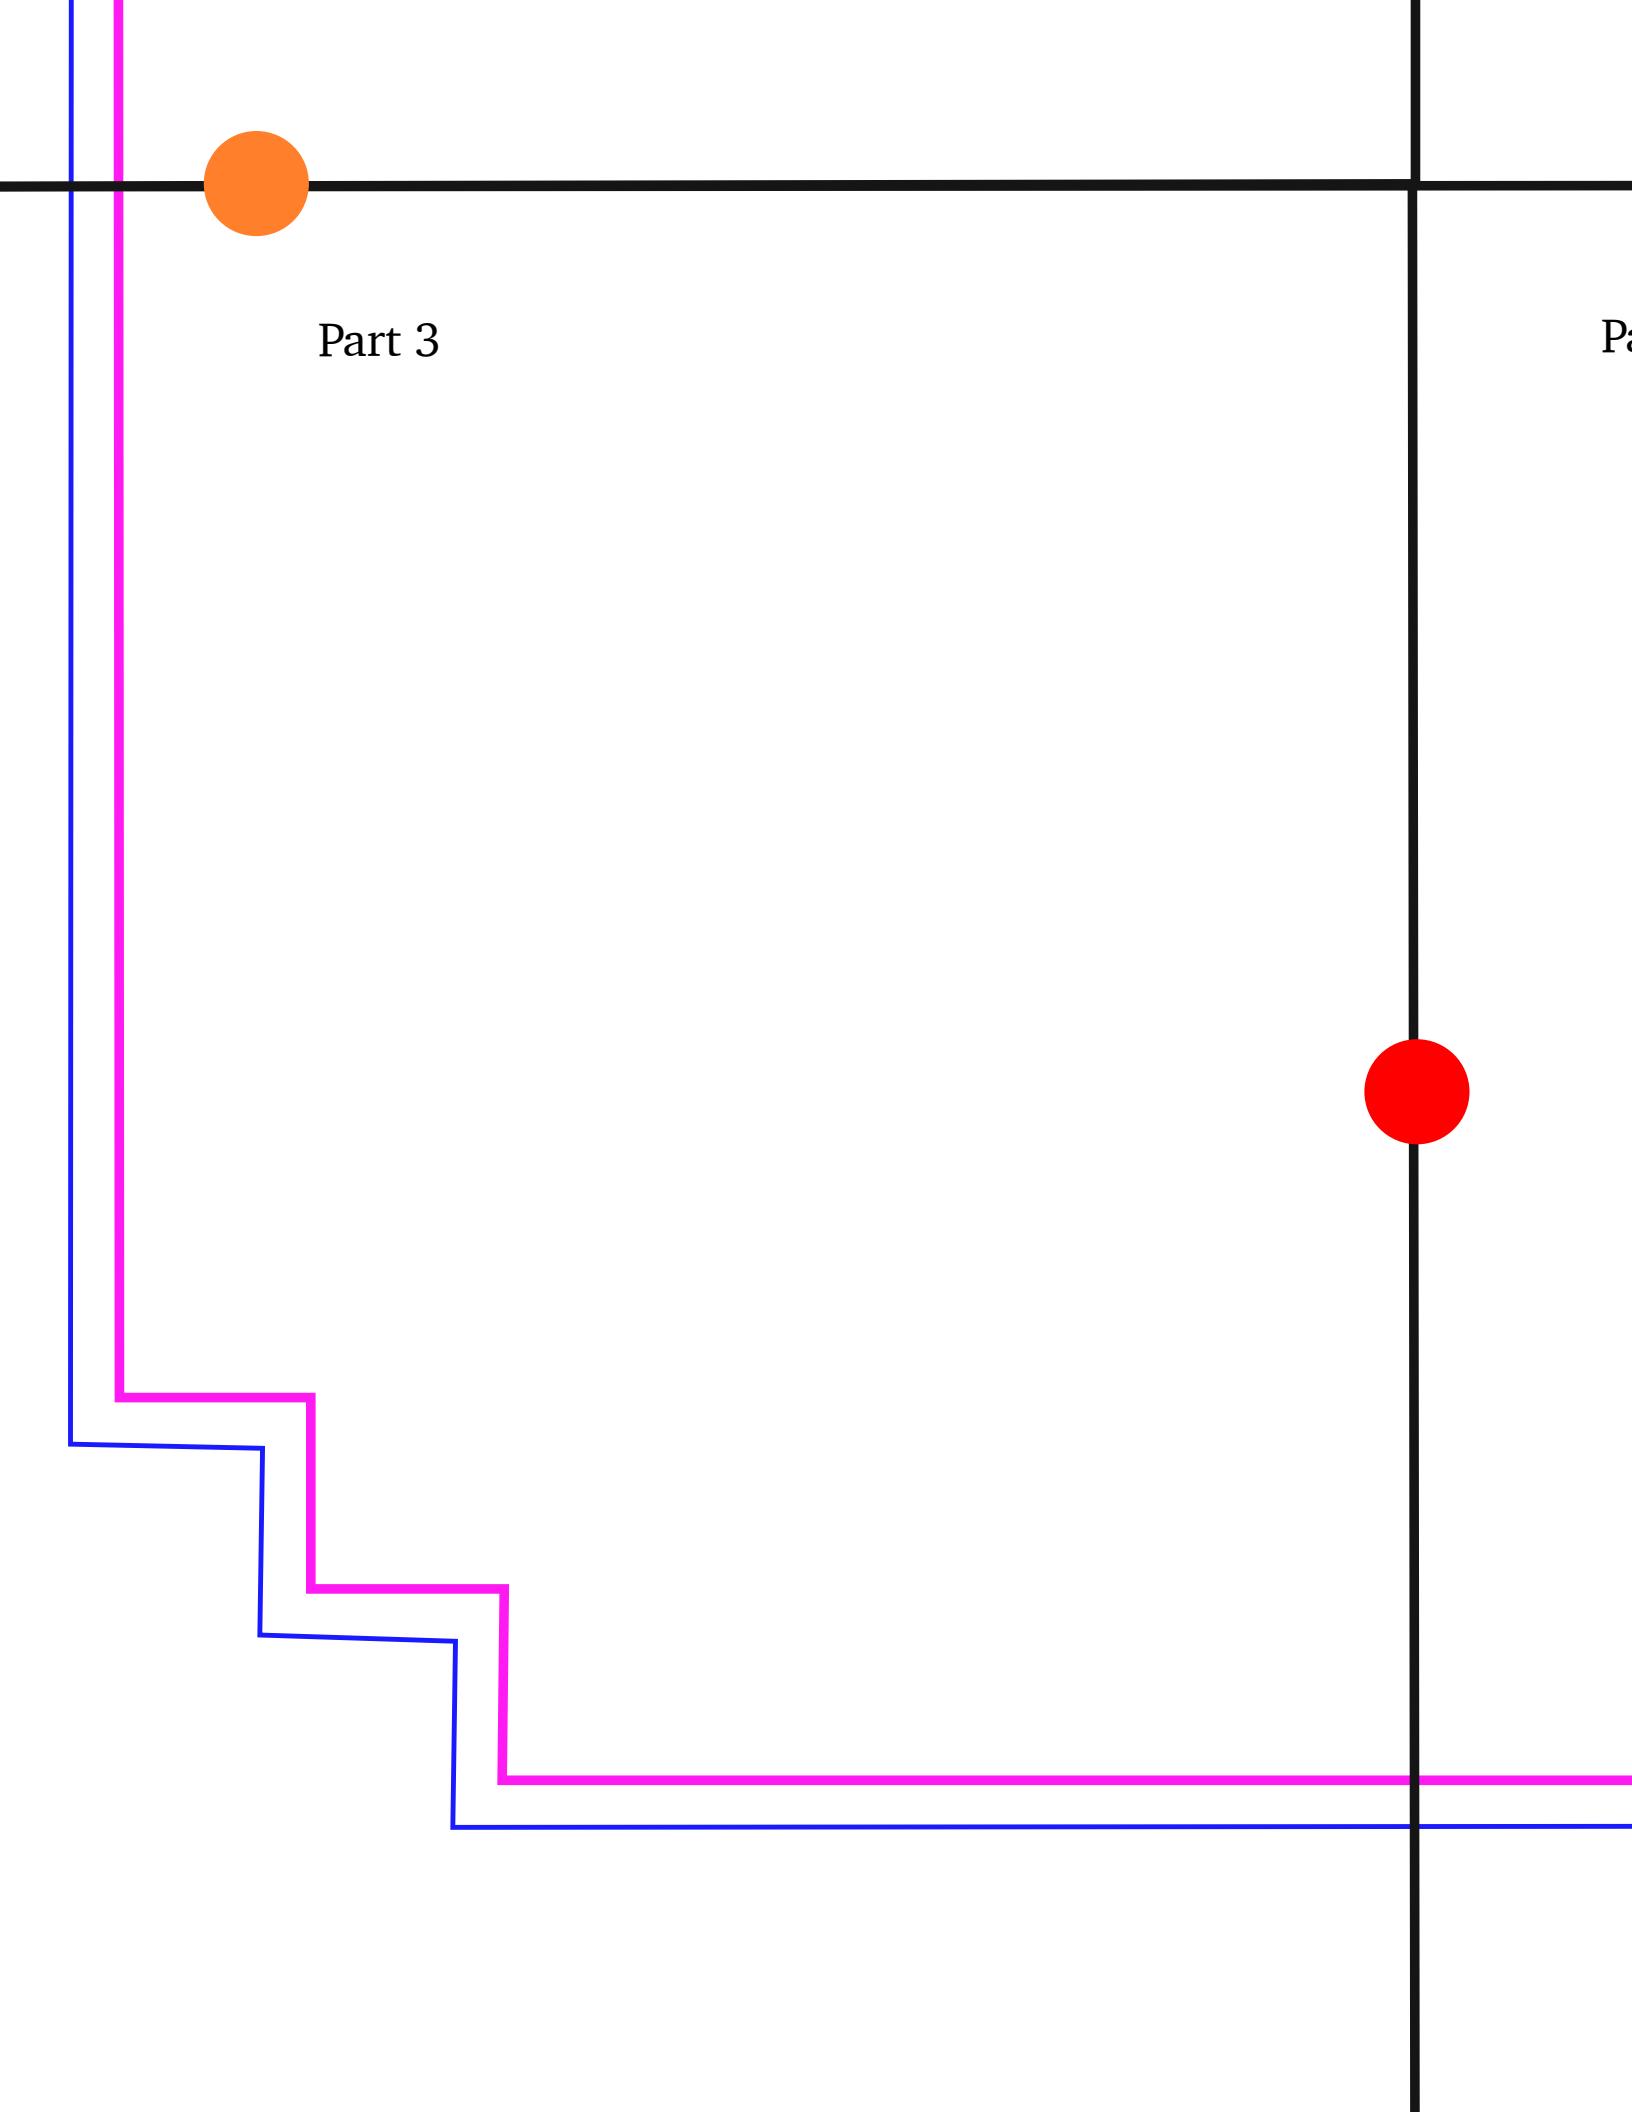

Part 4

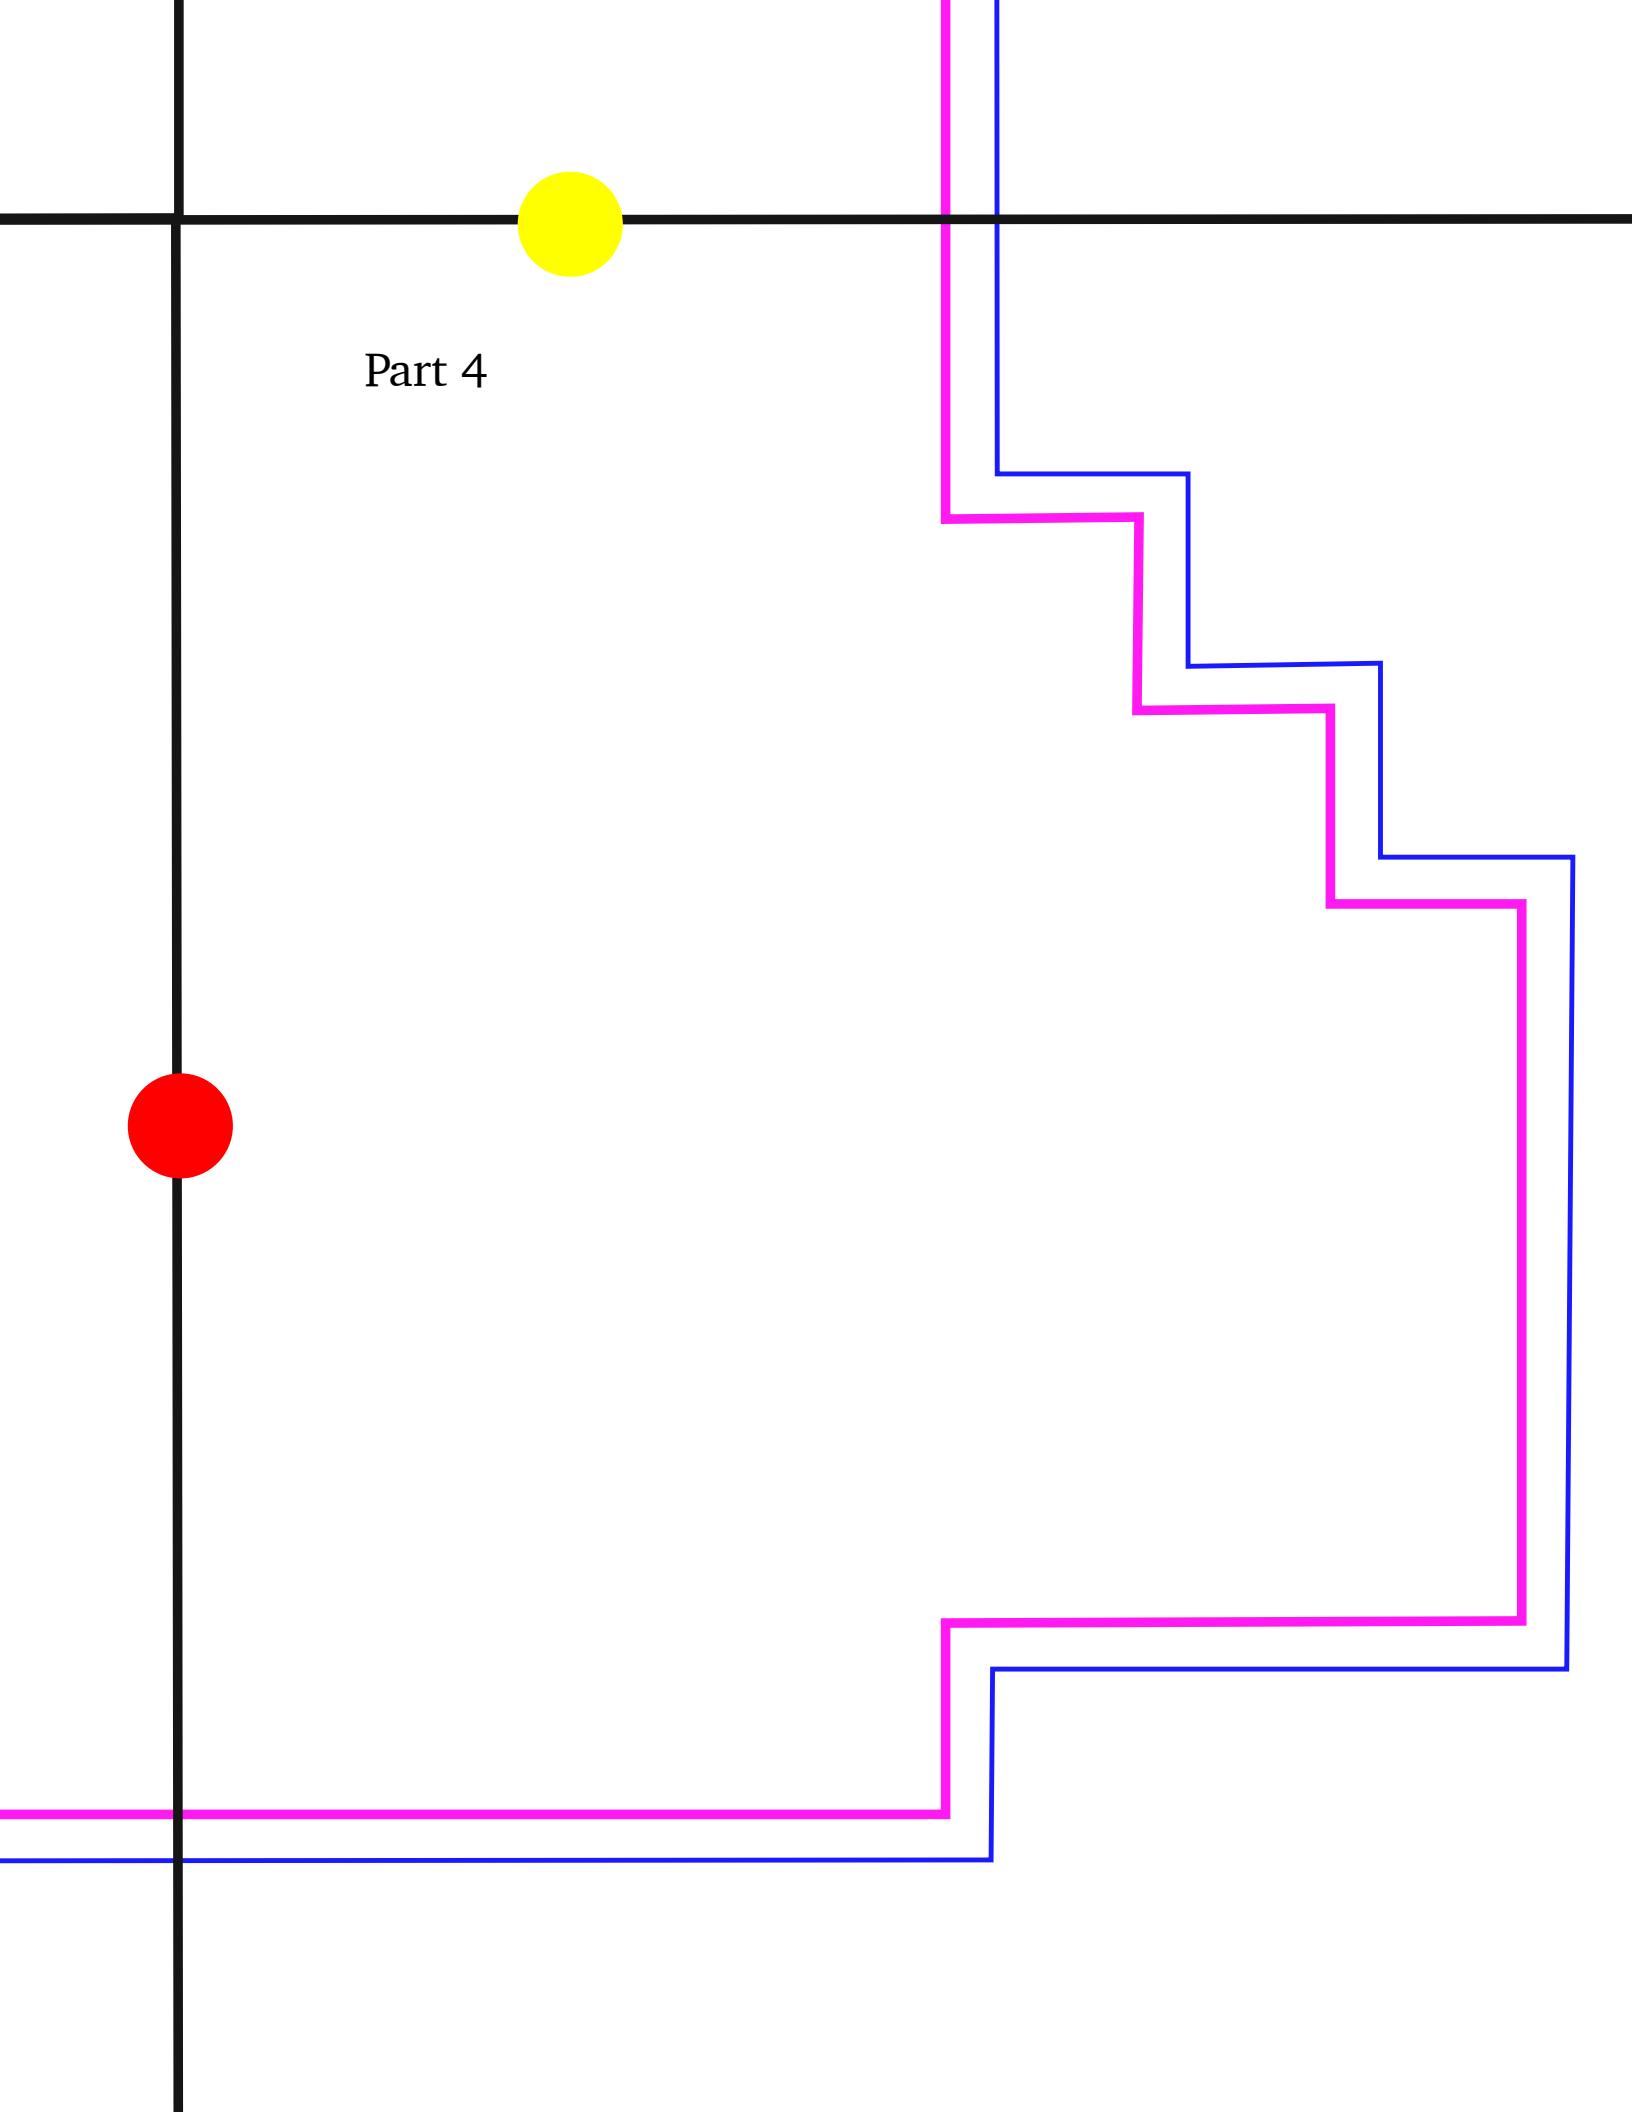



← Seam lines for attaching the cuff to the stocking →

Before attaching the cuff, sew along this line with fabric folded and right sides of the fabric in

